



UV

: WP-UVx-F2-1y

- - 0-5V 4-20mA
 -
- : UV
- :



UV

	(mm)	(g)		
	11	130	316L	
	T _{opt}	-30-85	°C	
	T _{sto}	-40-90	°C	
	p	10	bar	
(25 °C)				
	V _{cc}	9-24	V	
	I _{out}	4-20	mA	2 (WP-UVx-F2-11)
				3 (WP-UVx-F2-12)
	V _{out}	0-5	V	3 (WP-UVx-F2-13)
1		220-280	nm	WP-UVC-F2-1y
		220-325		WP-UVB-F2-1y
		220-370		WP-UVA-F2-1y
		290-440		WP-UVV-F2-1y
	P	0-200	mW/cm ²	2
	5pin			
	2			

¹ UVA, UVB, UVC, UVV UV



² : 0-200 mW/cm² (standard), 0-1 W/cm² (option), 0-10 W/cm² (option), 0-40 W/cm² (option).



UV

: WP-UVx-F2-1y

(unit: mm)

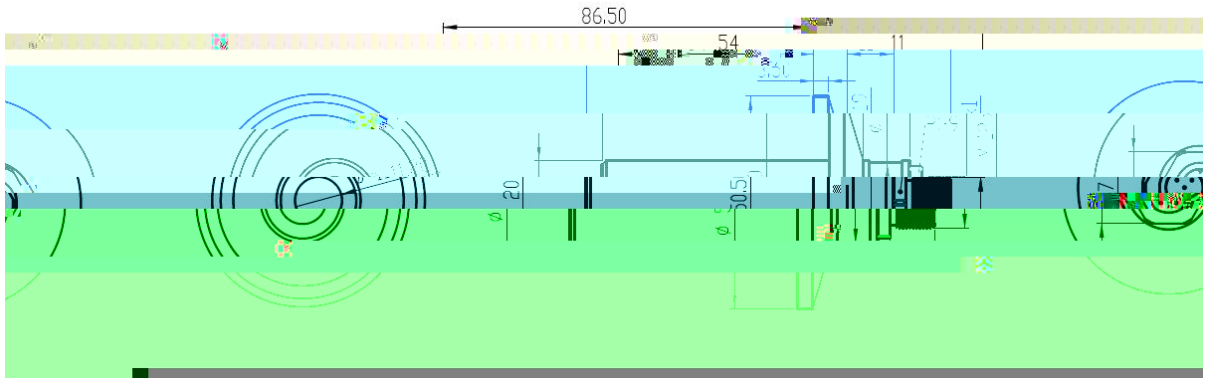


connector view
5 pin M 12×1
RSFM5

5 : 1=V_{CC}, 2= , 3= , 4= / , 5=

UV ()

-
-
-
-
-
-

100%
24 V

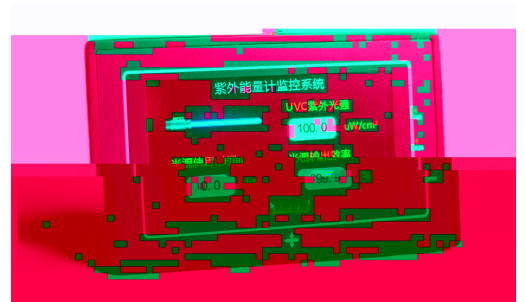

UV ()

-
-
-
-
-
-

5

RS-485

9-24 V

