



-
-
- 0-5V 4-20mA
-



(mm)

(g)



8

200

316L



T_{opt}	-30-85	°C
T_{sto}	-40-90	°C
p	10	bar

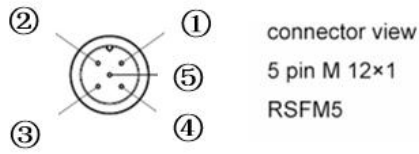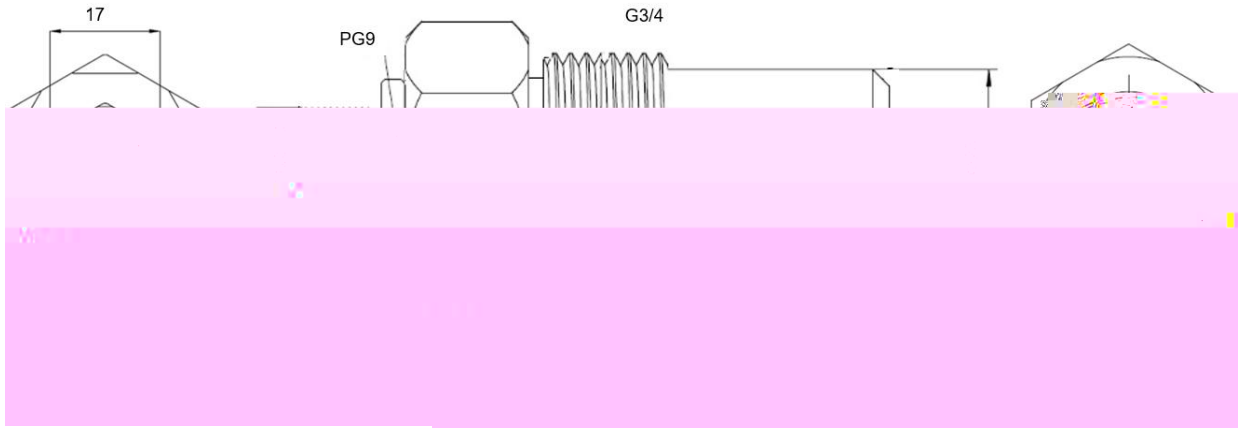

connector view
5 pin M 12×1
RSFM5

5 : 1=V_{CC}, 2= , 3= , 4= / , 5=

-
-
-
-
-
-

100%
24 V



-
-
-
-
-
-

5

RS-485

9-24 V

