



**UV**

**: WP-UVx-G3/4-4y**

:

- 
- 
- 
- 

0-5V 4-20mA

:

:



(mm)

(g)

11

160

316L



T<sub>opt</sub> -30-85 °C

T<sub>sto</sub> -40-90 °C

p 10 bar

(25 °C)

V<sub>cc</sub> 9-24 V


I



UV

: WP-UVx-G3/4-4y

(unit: mm)

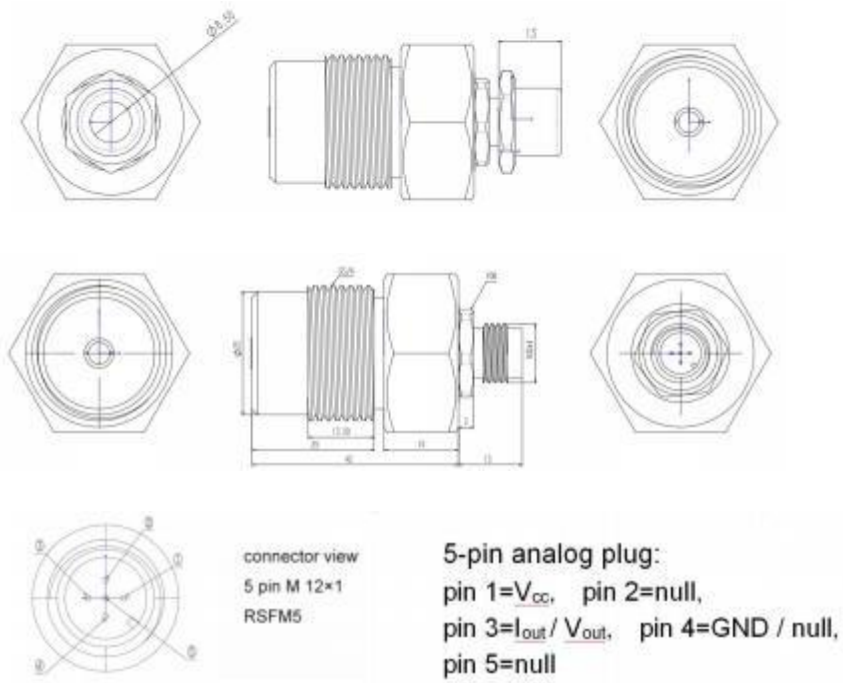

5 : 1=V<sub>cc</sub>, 2= , 3= , 4= / , 5=

UV ( )

- 
- 
- 
- 
- 
- 

100%  
24 V



UV ( )

- 
- 
- 
- 
- 

5

RS-485

9-24 V

